

LS SERIES

HORIZONTAL

LIQUID LEVEL

SENSORS



Operational Characteristics (1)

Switch Option		01	03	04	06	07	08
Contact Configuration		SPST	SPST	SPDT	SPST	SPST	SPST
Contact ratings		Reed Switch	Reed Switch	Reed Switch	Reed Switch	Triac(2)	Triac
Maximum (resistive loads)	Volts DC	100	100	100	100	AC only	AC only
	Volts AC	120	250	70	120	250	250
	Amps	1.0	1.0	0.5	3.0	3.0	1.0
	Watts	15	15	3	100		
Minimum withstand across open contacts	Volts	300	800	200	400	600	400
Initial Contact resistance	Ohms	0.25	0.25	0.25	0.75		

1. The above contact ratings are for resistive loads. For inductive, capacitive and tungsten filament lamp loads refer to the circuit protection notebook.

2. Available on 1/2" NPT only.

Environmental Specifications

Housing and Float Material (a)	Operating Temperature	Minimum Sg
LS3-Glass Filled Nylon 6.6 (b)	-30° to +130°C	0.85
LS4-WRC approved Glass Filled Polypropylene (c)	-30° to +110°C	0.65
LS5-WRC approved Glass Reinforced Polyphenylene	-30° to +130°C	0.70
LS7-Die Cast body Glass Filled Nylon 6.6 Float (b)	-30° to +130°C	0.85
LS8-Glass Filled Polypropylene (c)	-30° to +110°C	

Sealing Washer/Compression Grommet

Silicone	-54° to +150°C
Nitrile	-30° to +110°C
EPDM	-54° to +150°C

a. Detailed chemical resistance information for specific liquids is available on request.

b. Higher temperature models available.

c. For boiling water applications the maximum operating temperature limits are:- Continuous boiling water 80°C. Non continuous boiling water 100°C.



Mechanical Specification

Mounting Position	Operate Window	Release Angle	Shock	Vibration
±30° from horizontal	Minimum 5° from mounting angle	Maximum 40° from mounting angle	50g for 11ms duration (reed switch only)	35g up to 500Hz (reed switch only)



Electrical Connections

Switch options **01**, **03** and **06** with Standard Cable are fitted with 2 x 18 AWG, 32/0.2mm stranded, with PVC insulation approved to UL/CAS/BB6361. **07** and **08** with Standard Cable are fitted with 2 x 22 AWG, 16/0.2mm stranded, with PVC insulation approved to UL/CAS/BS6361. **01**, **03**, and **06** with Double Insulated Cable are fitted with 16/0.2mm stranded, with PVC insulation approved to UL/CAS/BS6500. **04** with Standard Cable is fitted with 3 x 24 AWG, 7/0.2mm stranded with PVC insulation. **04** with Double Insulated Cable is fitted with 7/0.2mm stranded with PVC insulation.

Internal Fitting

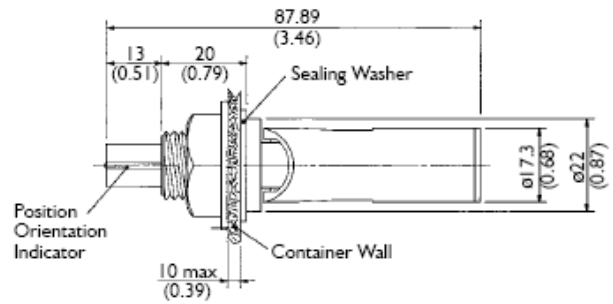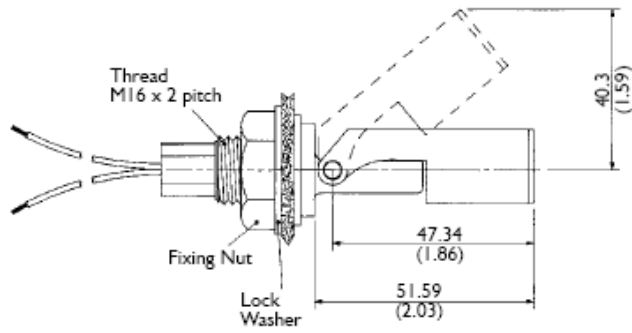

External Fitting

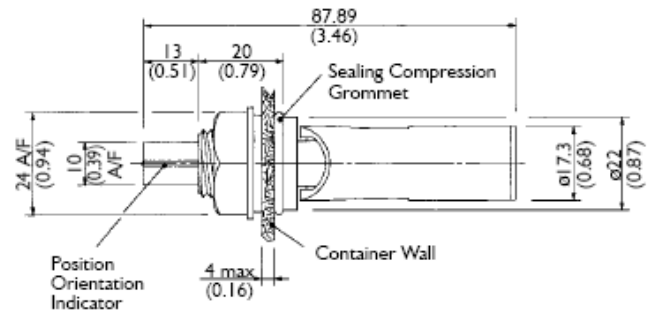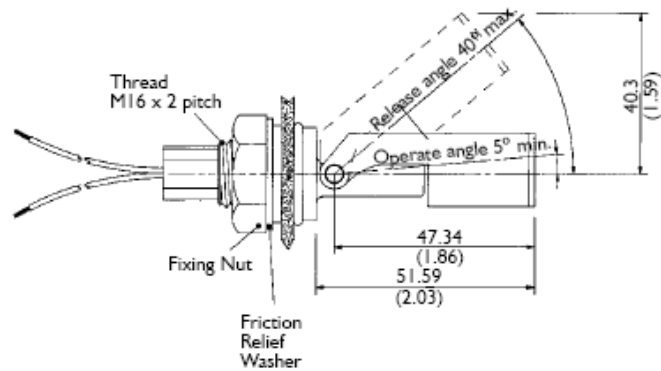

Mounting Bush Fitting

