




Impedance/Phase Angle vs. Frequency:

Tested under 1Vrms Oscillation Level

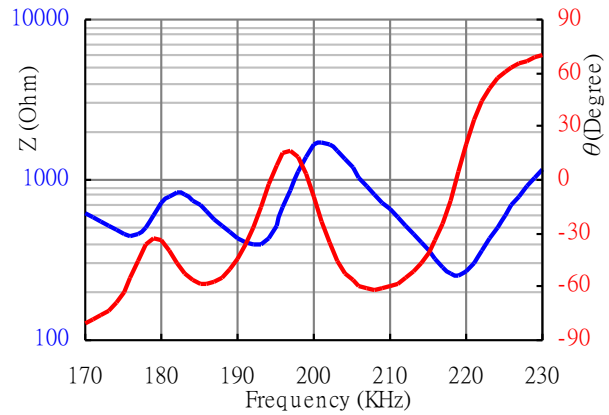


Specification

200GE180	Transceiver
Center Frequency	200.0±10KHz
Echo Sensitivity	-61dB
0dB = 20Vp-p , 40 Bursts	
Bandwidth (FOM)	10KHz
Nominal Impedance (Ohm)	600
Capacitance at 1Khz ±20%	600 pF
Max. Driving Voltage (Pulse)	50Vpp 10% duty cycle
Total Beam Angle	-6dB 10° typical
Matching Window	Resin with filler
Operation Temperature	-20 to 60°C
Storage Temperature	-30 to 70°C

Echo Sensitivity:

Tested under 20Vp-p @25cm ; 0dB=20Vp-p

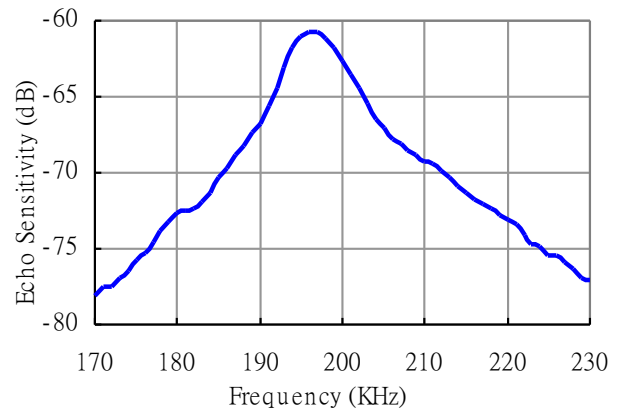


All specification taken typical at 25°C
 Closer frequency tolerance, shorter ringing and wider bandwidth models can be supplied upon request.


Model available:

1	200GE180	Aluminum Housing
---	----------	------------------

Dimensions: dimensions are in mm

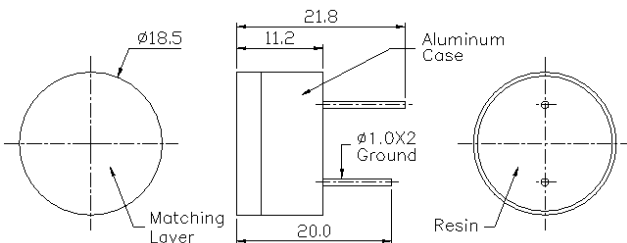

Beam Angle: Tested at 200.0Khz frequency

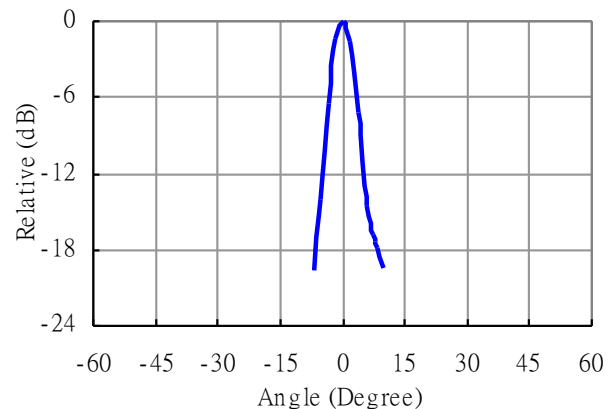

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105