



**Impedance/Phase Angle vs. Frequency**

Tested under 1Vrms Oscillation Level

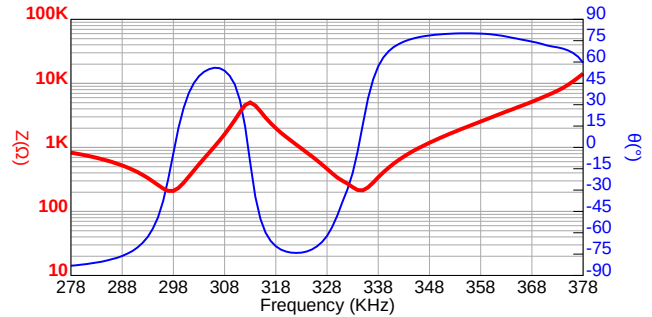


**Echo Sensitivity vs. Frequency**

Tested under 20Vp-p, 40 bursts, 10cm

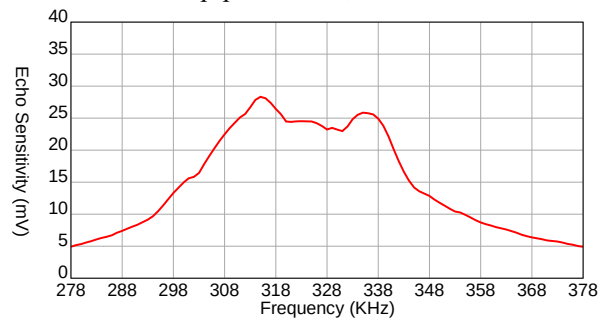


**Echo Sensitivity/Ringing**

Tested under 20Vp-p, 40 bursts, 10cm, 335KHz

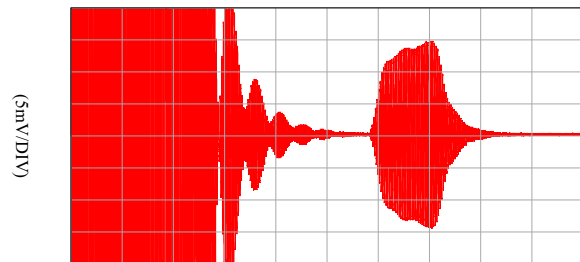

(0.1ms/DIV)

**Beam Angle: Tested at 328 KHz Frequency**

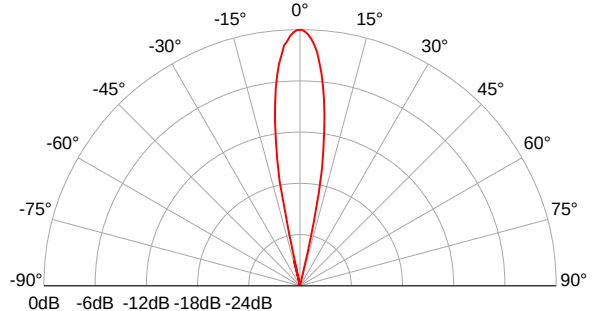


**Specification**

328SR093	Transceiver
Center Frequency	328.0±10.0KHz
Bandwidth Echo Sensitivity-6dB	10 KHz
Echo Sensitivity	-61 dB min.
0dB re 20Vp-p sine wave, 40 bursts @ 10cm	18 mVp-p min.
Dead Zone 10bursts	8 cm
Capacitance at 1KHz ±20%	270 pF
Max. Driving Voltage	50 Vp-p
Pulse 10% duty cycle tone burst	
Total Beam Angle -3dB	9.5° typical
-6dB	12.5° typical
Matching Window	Silicone Rubber
Operation Temperature	0°C to 70°C
Storage Temperature	-20°C to 80°C

All specification taken typical at 25°C

Low ringing model can be arranged

**Dimensions:** dimensions are in mm

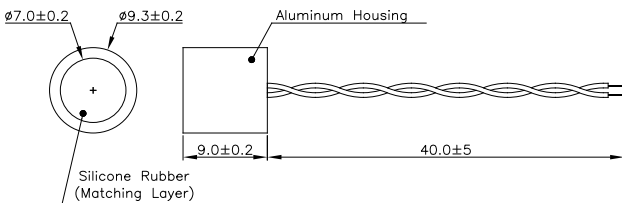


**S. Square Enterprise Company Limited**  
**Pro-Wave Electronics Corporation**

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: [sales@pro-wave.com.tw](mailto:sales@pro-wave.com.tw) ; Tel: 886-2-22465101 ; Fax: 886-2-22465105


**Sensitivity vs. Driving Burst Number**

Driving voltage 20Vp-p sine wave, Reflection target distance: 10cm @315KHz

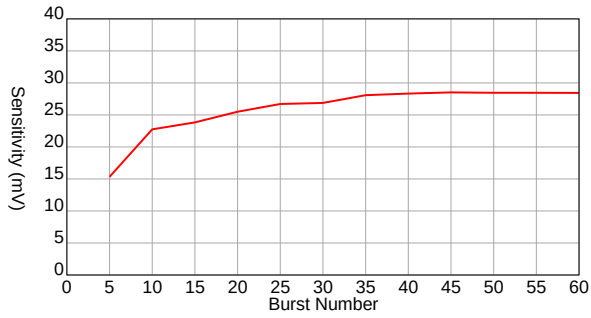

**Bandwidth vs. Driving Burst Number**

Driving voltage 20Vp-p sine wave, Reflection target distance: 10cm

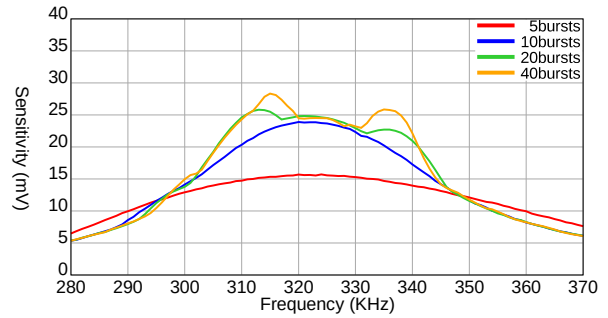

**S. Square Enterprise Company Limited**  
**Pro-Wave Electronics Corporation**

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: [sales@pro-wave.com.tw](mailto:sales@pro-wave.com.tw) ; Tel: 886-2-22465101 ; Fax: 886-2-22465105