

Bolt Clamped High Power Transducers



Features

- High efficiency & high output
- Large amplitude
- Low heat generation
- Durability & stability
- Easy connection

Applications

- Ultrasonic cleaners
- Ultrasonic welders
- Ultrasonic processing machines: bonding, drilling, etching, engraving and etc.


Specification

	30402S	45402H	45282H	60282H
Resonant frequency (KHz)	37.5	40.0	28.2	28
Motion Admittance (mMho)	35	15	50	40
Mechanic Q (Qm)	500	500	500	500
Capacitance (pF)	2700	4000	4000	4000
Allowable vibration rate (cm/sec.)	50	50	50	25


All specification taken typical at 25°C

Dimensions


Model: 30402S

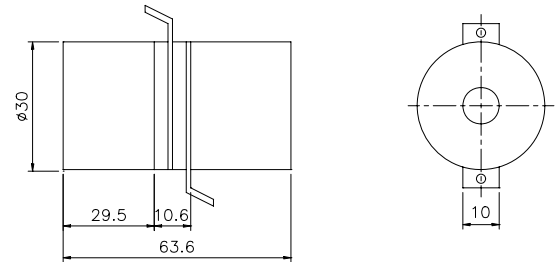


Model: 45402H

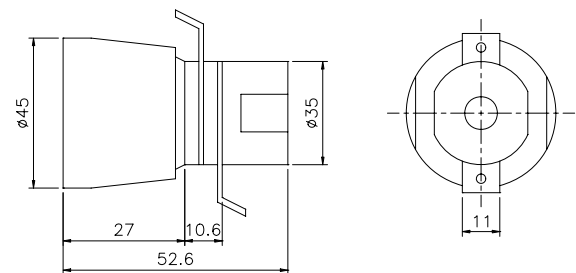

Model: 45282H

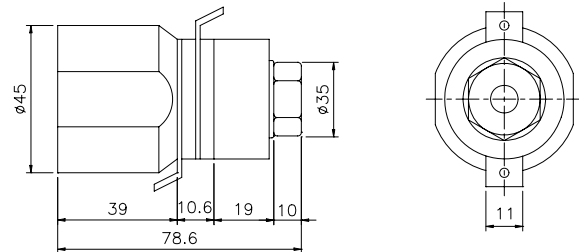

Model: 60282H

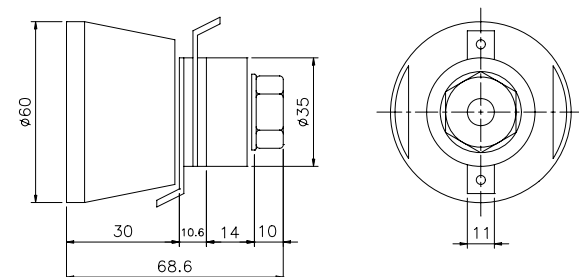

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation