



## PS2031AB

### PS2 Series Position Sensor

#### Features

- ✦ UL listed model
- ✦ Adjustable with XY axis using appropriate magnets
- ✦ Cable wiring from the Left of the package
- ✦ Repeatability of operation
- ✦ Shunt or direct magnet operation

#### Comments

- ✦ Robust Nylon Housing
- ✦ Single Pole Double Throw
- ✦ Surface Mounted by fixing screws
- ✦ Fully encapsulated
- ✦ Matching Magnet PM101 or PM102

#### Applications

- ✦ Door Interlocks
- ✦ Hook Switches
- ✦ Security Systems
- ✦ Safety Interlocks
- ✦ Position Indication

## PS 2031AB

PS2 Series | Position Sensor

### Material

<b>Housing Material</b>	Glass Filled Nylon 6.6
<b>Contact Material</b>	Ruthenium
<b>Operating Temperature °C</b>	-30 to 105
<b>Housing Colour</b>	Black

### Mechanical Specifications

<b>Shock</b>	50g for 11ms duration
<b>Vibration</b>	35g up to 500Hz
<b>IP</b>	IP65

### Switching

<b>Switch Action (Reed Switch)</b>	SPDT
<b>Max Switching Voltage VDC</b>	175
<b>Max Switching Voltage VAC</b>	125
<b>Max Switching Current Amps</b>	0.4 (DC) 0.28 (AC)
<b>Max Switching Load Watt</b>	5
<b>Operate Mode</b>	Direct Axis, Parallel Axis
<b>Contact Form</b>	C


### Cable

<b>Cable Length</b>	3 x 0.5M
<b>Connection Type</b>	Stripped Cables
<b>Cable Type</b>	UL1569 24AWG, 7/32mm PVC insulated
<b>Cable Colour</b>	Yellow/Blue/Black

### Mounting

<b>Fitment</b>	Surface
<b>Mounting</b>	Any Axis

### Technical Drawing

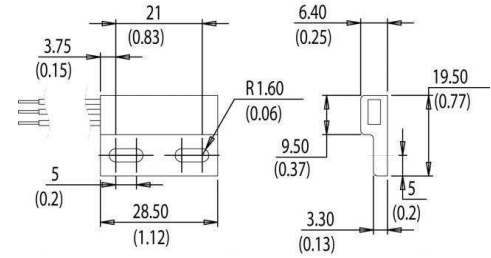

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Phone: +1-800-522-6752  
Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

#### EUROPE

MEAS Deutschland GmbH(Europe)  
a TE Connectivity Company  
Phone: +49-800-440-5100  
Email: [customercare.tlse@te.com](mailto:customercare.tlse@te.com)

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Phone: +86-0400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.