

Planar Navigation Antenna N70XLR

GPS low gain

Roof Mount



- **Water proof TÜV passed IP69K mounted**
- **Antenna available in black, white and blue other colours on demand**
- **Our products are RoHS- and REACH-conform**




Technical Data

GPS

Frequency	1575.42 MHz
VSWR	1.5 typ.
Peak Gain	20 dBi typ.
Power Supply	3V to 5V; 12mA typ.
<hr/>	
V _{DD} max.	+10V _{DC}
Input Power max.	+17dBm
Current max.	30mA

Mechanical Data

Dimensions (ØxH)	ca. 76 mm x 23 mm
Temperature Range	-40°C to +85°C (operating temperature)
Connection (Standard)	ca. 3m connecting cable RG174 with GPS/SMA(m) Other cablelengths and connectors see ordering example and connector list in Internet

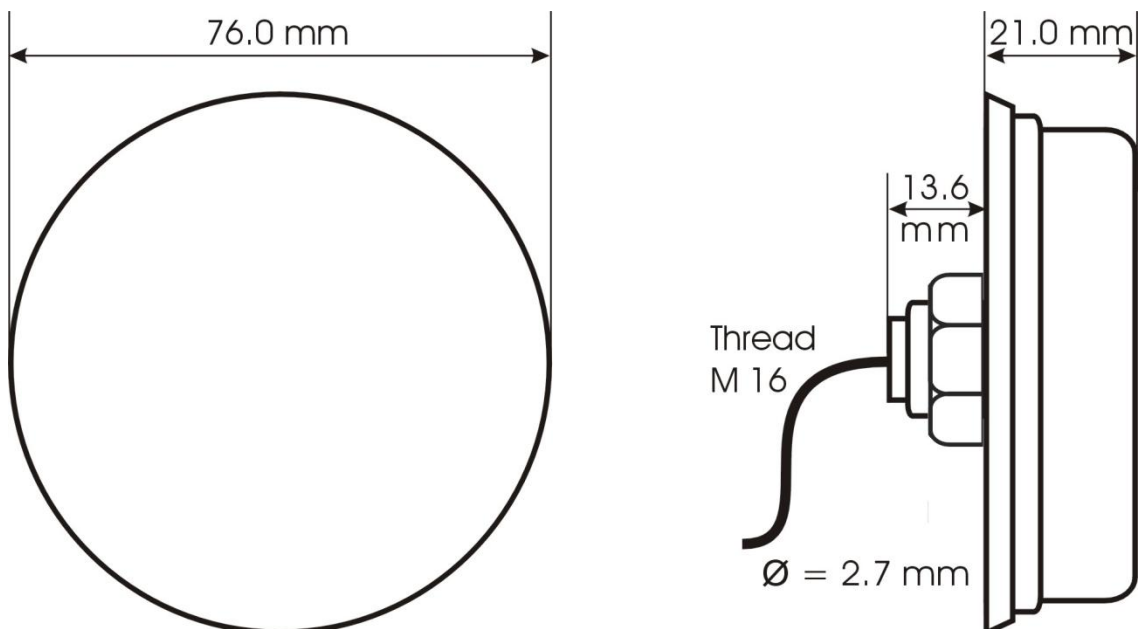


Accrediation

<input type="checkbox"/>	E-Code	e 13 02 1510	high gain (A)
<input checked="" type="checkbox"/>	E-Code	e 13 02 1509	low gain (L)
<input type="checkbox"/>	E-Code	e 13 03 6371	low current (V)

Mounting Instructions

- No extra ground planes are necessary for this antenna (ground plane inside).
- Mountable on all clean, smooth and rust free surfaces.
- Tightening torque on M16 nut is min. 4Nm to max. 6Nm
- Mounting bore hole is Ø 16mm (+2mm/-0mm)
- Alternatively the bottom is available as aluminum diecast with tightening torque 12 Nm to max. 15 Nm (AL).
- Mounting on a separate support possible, if the cable entrance is watertide.
- Antenna available with waterproof cable entrance (PW or AW).

Ordering example

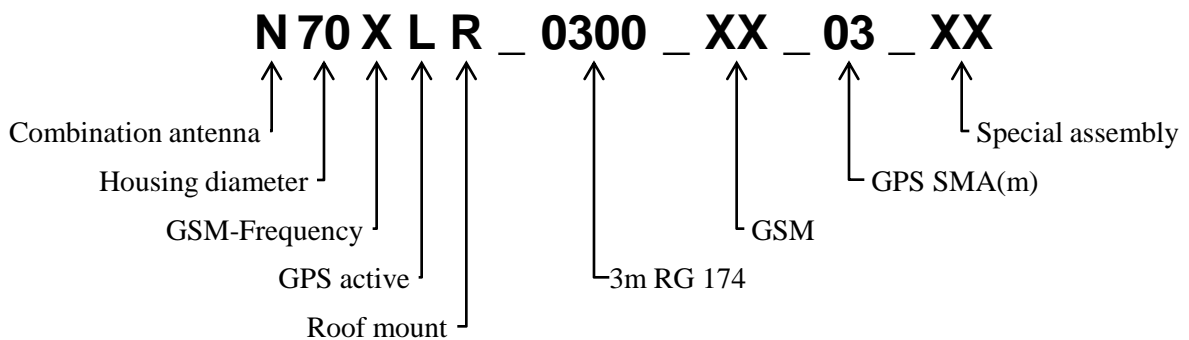

Warranty

The lawful warranty conditions apply.